


XMC interface FC communication board

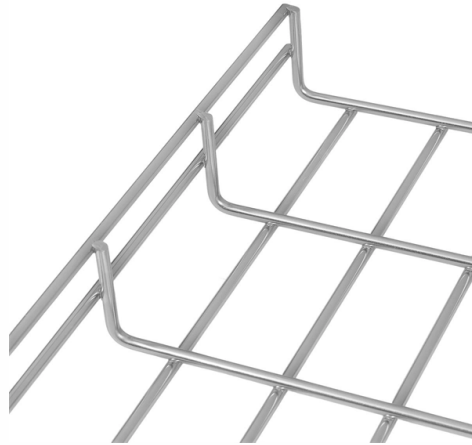

Overview

XMC is a mezzanine card standard - defined under VITA-42 - which upgrades a PMC (PCI Mezzanine Card) with high-speed serial fabric support. XMC leverages high-speed serial interconnects enabling higher bandwidth and greater signal integrity in harsh environments. The FC-75500 FibreACCESS XMC board series is based on DDC's third generation of two-channel Fibre Channel Network Access Controller (NAC) PMC boards. These ruggedized boards provide 1 and 2 Gb Fibre Channel interfaces for TCP/IP, UDP/IP, ASM, SCSI Initiator and FC-AE-1553 (High-Speed 1760) upper. Concurrent is a leader in the design and manufacture of XMC (Switched Mezzanine Card) modules for embedded and rugged applications. This module offers both data generation/simulation and monitor/ analyzer functions for simulation and test verification of nodes and/or. The Infineon Universal Serial Interface Channel (USIC) is a flexible interface module that covers several serial communication protocols. In contrast to the data input stage DX0, DX3. HWINn is only. XMC (or Switched Mezzanine Card) owes its existence to the embedded computing community's acceptance of a groundbreaking proposal in 2002 to standardize gigabit serial switched fabrics and defined in the ANSI/VITA 42. 3 XMC Mezzanine specification was a natural. This document comprises the Hardware Manual for the XMC-FC4 modules. This file is only available for registered users to download.

Article Content

ADC-XMC-STANDALONE User Manual V2

To allow compatibility with various XMC board pinouts, a personality wiring card that matches the XMC pinout is used to route signals through to the IO interfaces. Apart from the IO

Teradyne / Avionics Interface Technologies XMC-FC4 Datasheet

This module offers both data generation/simulation and monitor/ analyzer functions for simulation and test verification of nodes and/or switches communicating via the international communication

XMC Board Targets Communications Apps

The close integration of the analog IO, memory and host interface with the FPGA enables real-time signal processing at extremely high rates. The X6-250M has both XMC and PCI interfaces,

AVIONICS INTERFACES

All our interface board products have driver support for many operating systems provided with the board, including API source code examples so that users can tailor the code to suit their

XMC1100 CPU Card

Scope and purpose This document describes the features and hardware details of the XMC1100 CPU Card for Arduino™. This board is mounted with ARM® Cortex™-M0 based XMC1100

XMC for Arduino — XMC for Arduino documentation

XMC for Arduino Welcome to Infineon's XMC Microcontroller Boards for Arduino! The XMC microcontroller family from Infineon offers a powerful and versatile platform

V1151-Quad-Port-XMC-FPGA-Card-Datasheet

Increased Bandwidth & Flexibility The V1151 is the industry's most advanced XMC solution designed to provide a real-time high-bandwidth network interface and processing module for next generation

XMC User Guide, Rev

Ensuring that the XMC Connector J1 is properly aligned with the XMC connector of the carrier board, press the XMC401 and carrier board together so that their connectors are completely engaged.

Infineon-XMC4400_Platform2Go-UserManual-v1

Scope and purpose This document explains about the KIT_XMC_PLT2GO_XMC4400 Evaluation board: kit operation, out-of-the-box example and its operation, and the hardware details of the board.

XMC-FC4 Hardware Manual

This document comprises the Hardware Manual for the XMC-FC4 modules. The document covers the hardware installation, the board connections, the technical data, and a general description of the

AVIONICS INTERFACES

Recognizing the critical importance of subsystems communications in aircraft, Abaco Systems has developed a range of products that deliver the required reliability, speed, and richness

Avionics Interface Technologies (AIT) | Military Aerospace

Avionics Interface Technologies (AIT) Categories Buyer's Guide Board Products Communications/network controllers Data-acquisition boards I/O boards Communications and

XMC4800 Automation Board-V2 User Manual

The XMC4800 Automation Board-V2 provides a CAN interface via a D-Sub DE-9 connector. Infineon's high speed CAN transceiver IFX1051LE for industrial application supports 3.3V I/O logic and is

XMC4800 Automation Board-V3

The XMC4800 Automation Board-V3 provides a CAN interface via a D-Sub DE-9 connector. Infineon's high speed CAN transceiver IFX1051LE for industrial application supports 3.3V I/O logic and is

XMC Analog, Serial, Digital I/O

The XMC standard adds to the PMC specification by adding switched fabric interconnects to the existing PCI bus interface. An XMC module adds one, or optionally two, new connectors to the connectors

Infineon XMC1100 XMC 2Go Board communication interface with Arduino

I have an Infineon XMC1100 XMC 2Go board. I have been able to set up the Tools/Board Manager to include the XMC1100 XMC2Go selection. But after the sketch compiles I get this error:

Contact Us

For more information, pricing, or custom solutions, please contact us:

Website: <https://www.activa.net.pl>

Email: sales@activa.net.pl

Phone: +48 662 748 193

Address: ul. Cybernetyki 7B, 02-677 Warsaw, Poland

This document is for informational purposes only. Specifications subject to change without notice.

